



**Medium & High
Pressure Rated Models**
up to 7,000 PSIG

ASME PCC-2 Compliant

Fast Delivery
We deliver in days, not weeks!



SNAP IT® JR & SR Engineered Tube Plugs & Accessories

*Widely utilized in Refining, Chemical, Power Generation,
Water/Wastewater, Pharmaceutical, Semiconductor
& many other industrial sectors.*



(800)456-8721 • USAIndustries.com

BRINGING SERVICE CLOSER:

S. Houston, TX | Corpus Christi, TX | Prairieville, LA | Broken Arrow, OK
New Locations Coming Soon!

The top section of the page features a blue-tinted background image of an industrial facility with tall distillation columns and piping. Overlaid on this image is the text 'ABOUT' in a smaller, bold, white sans-serif font, and 'USAI' in a very large, bold, white sans-serif font. A thick white diagonal line cuts across the right side of the image.

ABOUT USAI

USA Industries is proud to be an ISO 9001:2015–certified leader in designing, manufacturing, and supplying innovative solutions for piping isolation, testing, and maintenance across heat exchangers, boilers, and condensers. With state-of-the-art facilities in Texas and Louisiana, our team of experts is dedicated to delivering exceptional quality and support throughout every step of the rental, purchasing, and customer service process.

Our portfolio of industry-leading products includes cutting-edge solutions trusted across a wide range of industries, notably our ASME PCC-2 compliant, Snap It® Jr. (*medium pressure*) and Sr. (*high pressure*) engineered tube plugs.

Industries We Serve:

- Oil & Gas
- Refining
- Petrochemical
- Chemical Processing
- Energy & Power Generation
- Nuclear Utilities
- Water & Wastewater Treatment
- Pharmaceutical
- Semiconductor
- Paper & Pulp Mills

many other industrial sectors

Around-the-Clock Support:

We're here for you 24/7, 365 days a year — ready to provide the expert guidance and service that sets us apart. Contact us today to experience the USA Industries difference.

JR



Snap-It tube plugs provide a safe, weld-free solution for sealing heat exchanger, boiler, and condenser tubes. When installed correctly, they stop leaks without damaging tubes or tube sheets. The system includes full tube preparation and installation tooling for both near-end and far-end applications, making tube plugging faster, easier, and more reliable than traditional methods.

Safety:

- Withstands blowout pressures over 18,000 PSID.
- Eliminates welding, reducing the risk of igniting hazardous chemicals or fumes.

Save Time & Labor Costs:

- Quick installation in minutes.
- Enables “through-the-tube plugging” without removing the rear head cover.
- No welding required.
- Reduces maintenance labor costs and unit downtime.

Cost-Effective:

- Higher initial cost offset by labor savings and reduced downtime.
- Prevents damage to tube sheets and ligaments, minimizing costly maintenance.
- Reduces reloading times in tubular reactors.

Versatile & Reliable:

- Fits multiple tube sizes and available in various materials.
- Compatible with existing installation/removal systems.
- Affordable tooling rental or purchase options.
- Guaranteed leak-free helium seal to 1×10^{-9} c/sec.

Kit:

Ten (10) plugs, one (1) Go/No-Go Gage

Pressure Rating:

1000 PSID (68.9 BarG) - *Higher pressures available upon request*

Tube ID Size Ranges:

0.472” to 1.336” (11.99mm to 33.93mm) - *Larger/smaller sizes available upon request*


Standard Materials:

Brass, Carbon Steel, Stainless Steel (304 & 316) - *Any alloy available upon request*


Snap-It Plugs must be installed within the tube's rolled section in the tubesheet. If tubes are not rolled, contact USA Industries (800-456-8721) before installation. Clean scale and pitting using Snap-It Brushes, and remove any weld droop to ensure proper seating of the plug.

PLUG PARTS & INSTALLATION EXPLANATION

JR

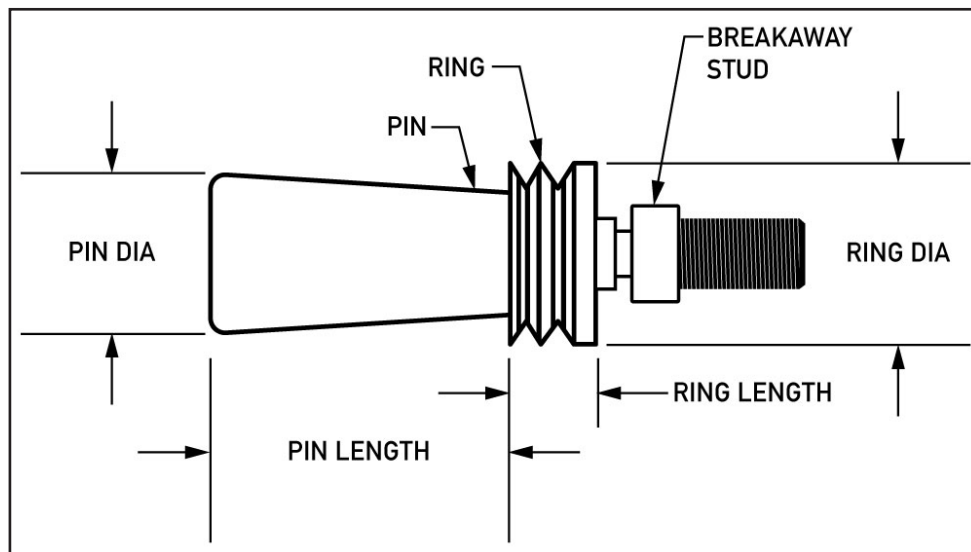

Can be used in high temperature/pressure heat exchangers

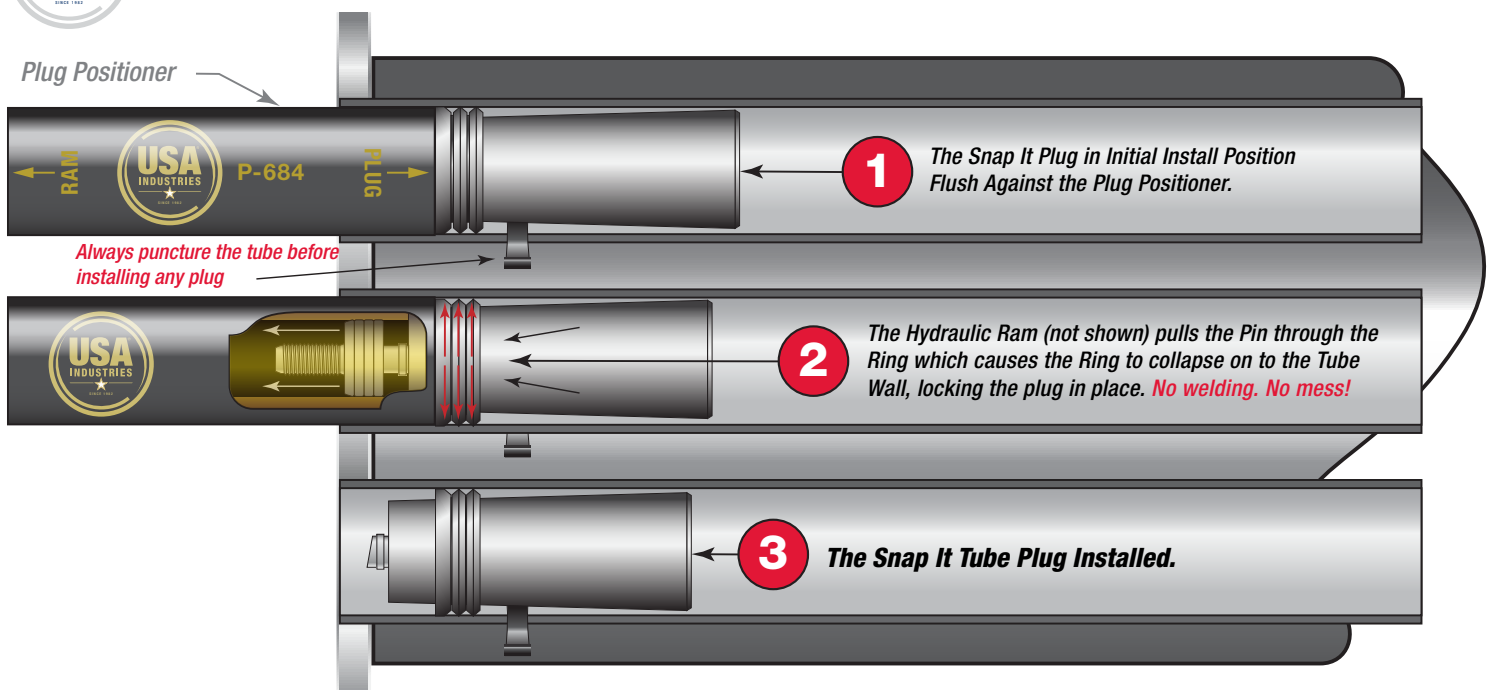

SPECS & ACCESSORIES

JR



Plug #	Plug Range - Tube ID In(mm)	Pin Length In(mm)	Brush Kit	Positioner	Pull Rod	Channel Head Pull Rod
JR-471-"m"	0.472-0.515 (11.99-13.08)	1.63 (41.4)	JRA-471**	PP-471	I	CHPRA-"X"-I
JR-491-"m"	0.492-0.540 (12.50-13.72)	1.67 (42.4)	JRA-491**	PP-491		
JR-512-"m"	0.513-0.562 (13.03-14.27)	1.59 (40.3)	JRA-512**	PP-512		
JR-524-"m"	0.525-0.585 (13.34-14.86)	1.28 (32.5)	JRA-524**	PP-524		
JR-555-"m"	0.556-0.616 (14.12-15.65)	1.40 (35.6)	JRA-555**	PP-555		
JR-584-"m"	0.585-0.649 (14.86-16.48)	1.32 (35.5)	JRA-584**	PP-584	II	CHPRA-"X"-II
JR-621-"m"	0.622-0.689 (15.80-17.50)	1.57 (39.9)	JRA-621**	PP-621		
JR-649-"m"	0.650-0.713 (16.51-18.11)	1.32 (35.5)	JRA-649**	PP-649		
JR-670-"m"	0.671-0.740 (17.04-18.80)	1.66 (42.2)	JRA-670**	PP-670		
JR-712-"m"	0.713-0.777 (18.11-19.74)	1.32 (35.5)	JRA-712**	PP-712		
JR-735-"m"	0.736-0.810 (18.69-20.57)	1.68 (42.7)	JRA-735**	PP-735		
JR-774-"m"	0.775-0.838 (19.69-21.29)	1.32 (35.5)	JRA-774**	PP-774	III	CHPRA-"X"-III
JR-804-"m"	0.805-0.890 (20.45-22.61)	1.7 (43.2)	JRA-804**	PP-804		
JR-837-"m"	0.838-0.902 (21.29-22.91)	1.32 (35.5)	JRA-837**	PP-837		
JR-853-"m"	0.854-0.949 (21.69-24.10)	1.72 (43.7)	JRA-853**	PP-853		
JR-899-"m"	0.900-0.963 (22.86-24.46)	1.32 (35.5)	JRA-899**	PP-899		
JR-919-"m"	0.920-1.019 (23.37-25.88)	1.76 (44.7)	JRA-919**	PP-919		
JR-962-"m"	0.963-1.027 (24.46-26.09)	1.32 (35.5)	JRA-962**	PP-962		
JR-979-"m"	0.980-1.079 (24.89-27.41)	1.82 (46.2)	JRA-979**	PP-979		
JR-1024-"m"	1.025-1.088 (26.04-27.64)	1.32 (35.5)	JRA-1024**	PP-1024		
JR-1054-"m"	1.055-1.156 (26.80-29.31)	1.90 (48.3)	JRA-1054**	PP-1054		
JR-1087-"m"	1.088-1.152 (27.65-29.26)	1.32 (35.5)	JRA-1087**	PP-1087		
JR-1103-"m"	1.104-1.203 (28.04-30.56)	1.90 (48.3)	JRA-1103**	PP-1103		
JR-1149-"m"	1.150-1.213 (29.21-30.81)	1.32 (35.5)	JRA-1149**	PP-1149		
JR-1171-"m"	1.172-1.270 (29.77-32.26)	2.00 (50.8)	JRA-1171**	PP-1171		
JR-1212-"m"	1.213-1.336 (30.81-33.93)	2.00 (50.8)	JRA-1212**	PP-1212		

Notes:

"m"- Substitute the suffix "m" with the following material code: C - carbon steel, S - 316 stainless, B - brass, Y - Cr/Moly, M - monel, K - 90/10 CuNi, J - 70/30 CuNi. Other Materials Available.

** - For Brass, Copper, or Copper Nickel tubes add the Suffix -LD to the Brush Kit. Tube Preparation Brushes are required for use with Snap It™ Jr Plugs.

"X"- Channel Head Pull Rod Assemblies are available in 2', 4', or 6' lengths. Insert the appropriate # for the length required. For Through the Tube Applications, Extension Assemblies (See page 7T) are available in 2', 4', or 6' lengths. Specify the total # of each size needed for your application.

SIZING CHART FOR ROLLED TUBES

JR



	TUBE GAUGE		TUBE O.D.					
	BWG	WALL TKNS	5/8"	3/4"	7/8"	1"	1 1/4"	1 1/2"
Rolled I.D.	8				.578	.703	.953	1.203
Near End	8				555-M	670-M	919-M	1171-M
Far End	8				524-M	649-M	899-M	1171-M
Rolled I.D.	9	0.148		.484	.609	.734	.984	1.234
Near End	9	0.148		471-M	584-M	712-M	979-M	1212-M
Far End	9	0.148		471-M	555-M	670-M	919-M	1171-M
Rolled I.D.	10	0.134		.509	.634	.759	1.009	1.259
Near End	10	0.134		491-M	621-M	735-M	979-M	1212-M
Far End	10	0.134		471-M	584-M	712-M	962-M	1171-M
Rolled I.D.	11	0.12		.534	.659	.784	1.034	1.284
Near End	11	0.12		524-M	649-M	774-M	1024-M	1212-M
Far End	11	0.12		491-M	621-M	735-M	979-M	1212-M
Rolled I.D.	12	0.109		.554	.679	.804	1.054	1.304
Near End	12	0.109		524-M	670-M	774-M	1024-M	1212-M
Far End	12	0.109		512-M	621-M	735-M	979-M	1212-M
Rolled I.D.	13	0.095		.579	.704	.829	1.079	1.329
Near End	13	0.095		555-M	670-M	804-M	1054-M	1212-M
Far End	13	0.095		524-M	649-M	774-M	1024-M	1212-M
Rolled I.D.	14	0.083	.476	.601	.726	.851	1.101	
Near End	14	0.083	471-M	584-M	712-M	837-M	1087-M	
Far End	14	0.083	555-M	670-M	804-M	1054-M		
Rolled I.D.	15	0.072	.495	.620	.745	.870	1.120	
Near End	15	0.072	471-M	584-M	712-M	837-M	1103-M	
Far End	15	0.072	471-M	584-M	712-M	837-M	1054-M	
Rolled I.D.	16	0.065	.508	.633	.758	.883	1.133	
Near End	16	0.065	491-M	621-M	735-M	853-M	1103-M	
Far End	16	0.065	471-M	584-M	712-M	837	1054-M	
Rolled I.D.	17	0.058	.521	.646	.771	.896	1.146	
Near End	17	0.058	512-M	621-M	735-M	853-M	1103-M	
Far End	17	0.058	491-M	584-M	735-M	853-M	1103-M	
Rolled I.D.	18	0.049	.537	.662	.770	.912	1.162	
Near End	18	0.049	524-M	649-M	774-M	899-M	1149-M	
Far End	18	0.049	491-M	621-M	735-M	853-M	1103-M	
Rolled I.D.	19	0.042	.549	.674	.799	.924	1.174	
Near End	19	0.042	524-M	649-M	774-M	899-M	1149-M	
Far End	19	0.042	512-M	621-M	735-M	853-M	1149-M	
Rolled I.D.	20	0.035	.562	.687	.812	.937	1.187	
Near End	20	0.035	524-M	649-M	774-M	899-M	1149-M	
Far End	20	0.035	524-M	649-M	774-M	853-M	1149-M	
Rolled I.D.	21	0.032	.567	.692	.817	.942	1.192	
Near End	21	0.032	555-M	670-M	804-M	919-M	1171-M	
Far End	21	0.032	524-M	649-M	774-M	853-M	1149-M	
Rolled I.D.	22	0.028	.575	.700	.825	.950	1.200	
Near End	22	0.028	555-M	670-M	804-M	919-M	1171-M	
Far End	22	0.028	524-M	649-M	774-M	919-M	1171-M	
Rolled I.D.	23	0.025	.580	.705	.830	.955	1.205	
Near End	23	0.025	555-M	670-M	804-M	919-M	1171-M	
Far End	23	0.025	555-M	670-M	804-M	919-M	1171-M	
Rolled I.D.	24	0.022	.585	.710	.835	.960	1.210	
Near End	24	0.022	555-M	670-M	804-M	919-M	1171-M	
Far End	24	0.022	555-M	670-M	804-M	899-M	1171-M	

A
V
A
I
L
A
B
L
E

O
N

R
E
Q
U
E
S
T

Substitute the suffix "M" with the following material code:

C = Carbon Steel

B = Brass

S = 316 SS

J = 70/30 CuNi

K = 90/10 CuNi

Y = Chrome/Moly

M = Monel

I = Inconel

N = Nickel 200

T = Titanium

H = Hastelloy

Z = Zirconium

Near End = Plugging front end of tube sheet

Far End = "Through the tube," plugging rear end of tube sheet

NOTES:

1) Tube ID's often vary between inlet & outlet due to corrosion and/or erosion, this chart and recommended tube sizes are to be used as Reference only.

2) Tube Preparation Brushes are required for use with all Snap It Plugs.

* Larger sizes available upon request

All tube inner diameters listed above are based upon a 10% wall reduction

SR



The **Snap It® Sr. Engineered Tube Plug**, exclusively produced by **USA Industries**, provides a reliable, weld-free solution for high-pressure heat exchangers, with installation times up to **80% faster** than conventional tapered plugs. Designed to protect the tube sheet's integrity, this plug can endure pressures of up to **7,000 PSID**.

Safety:

- Withstands blowout pressures over 28,000 PSID.
- Eliminates welding, reducing the risk of igniting hazardous chemicals or fumes.

Save Time & Labor Costs:

- Quick installation in minutes.
- No welding required.
- Reduces maintenance labor costs and unit downtime.

Cost-Effective:

- Higher initial cost offset by labor savings and reduced downtime.
- Prevents damage to tube sheets and ligaments, minimizing costly maintenance.
- Reduces reloading times in tubular reactors.

Versatile & Reliable:

- Fits multiple tube sizes and available in various materials.
- Compatible with existing installation/removal systems.
- Affordable tooling rental or purchase options.
- Guaranteed leak-free helium seal to 1×10^{-9} c/sec.

Kit:

Ten (10) plugs, one (1) Go/No-Go Gage

Pressure Rating:

7000 PSID (483 BarG) - Higher pressures available upon request

Tube ID Size Ranges:

0.401" to 1.180" (11.99mm to 29.97mm) - Larger/smaller sizes available upon request


Standard Materials:

Brass, Carbon Steel, Stainless Steel (304 & 316) - Any alloy available upon request


Snap-It Plugs must be installed within the tube's rolled section in the tubesheet. If tubes are not rolled, contact USA Industries (800-456-8721) before installation. Clean scale and pitting using Snap-It Brushes, and remove any weld droop to ensure proper seating of the plug.

PLUG PARTS & INSTALLATION EXPLANATION

SR

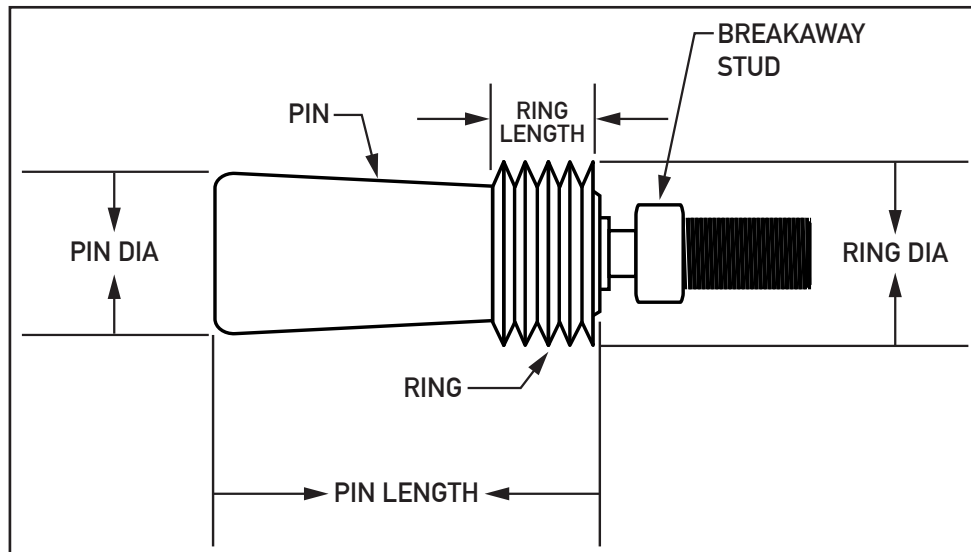

Can be used in high temperature/pressure heat exchangers

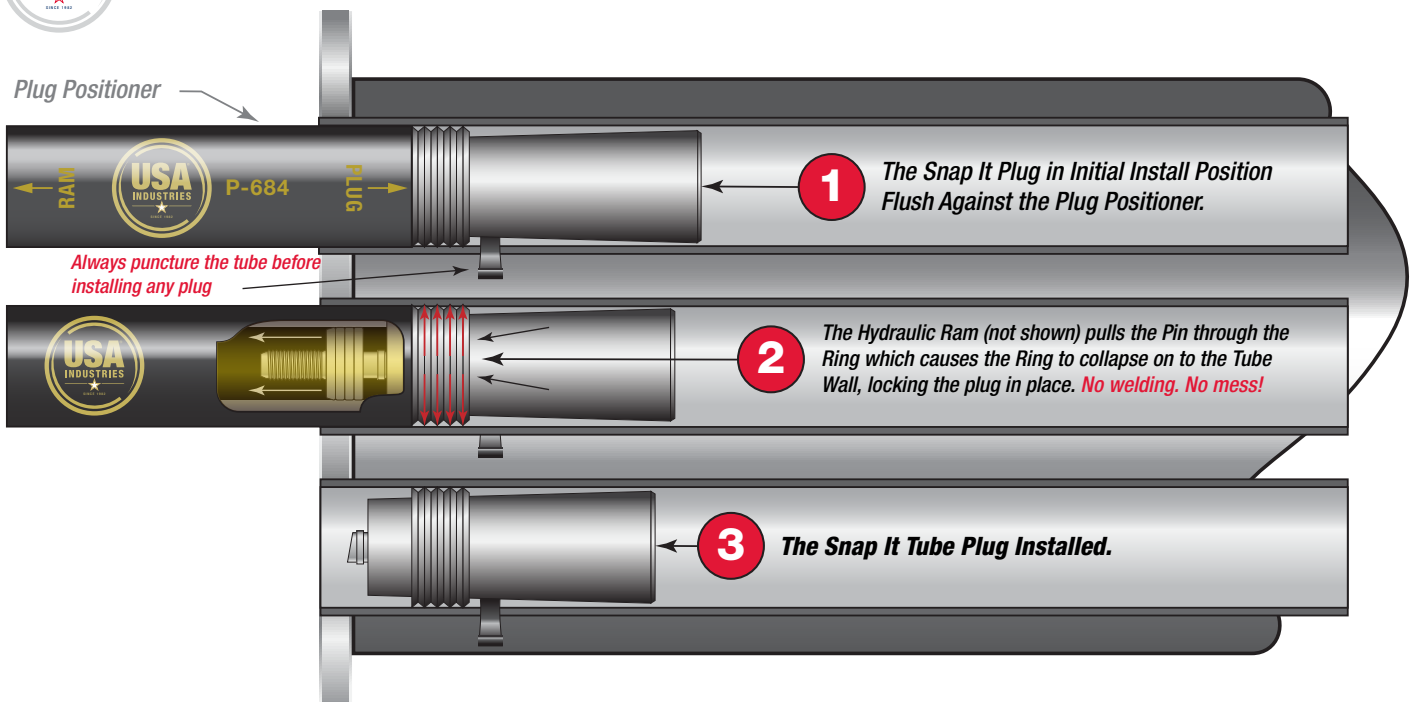

SPECS & ACCESSORIES

SR



SR Kit Part No.	Plug Range - Tube ID Inches (mm)	Brush Kit	Positioner	Plug Positioner	Pull Rod Assembly	Channel Head Pull Rod		
SR-400-"m"	0.401-0.420 (10.16-10.68)	SRA-400-"m"	PP-400	PP 400-440	I	CHPRA-"X"-I		
SR-420-"m"	0.421-0.440 (10.69-11.19)	SRA-420-"m"	PP-420					
SR-440-"m"	0.441-0.460 (11.20-11.70)	SRA-440-"m"	PP-440					
SR-460-"m"	0.461-0.480 (11.71-12.21)	SRA-460-"m"	PP-460	PP 460-500				
SR-480-"m"	0.481-0.500 (12.22-12.72)	SRA-480-"m"	PP-480					
SR-500-"m"	0.501-0.520 (12.73-13.22)	SRA-500-"m"	PP-500					
SR-520-"m"	0.521-0.540 (13.23-13.73)	SRA-520-"m"	PP-520	PP 520-580				
SR-540-"m"	0.541-0.560 (13.74-14.24)	SRA-540-"m"	PP-540					
SR-560-"m"	0.561-0.580 (14.25-14.75)	SRA-560-"m"	PP-560					
SR-580-"m"	0.581-0.600 (14.76-15.26)	SRA-580-"m"	PP-580					
SR-600-"m"	0.601-0.620 (15.27-15.76)	SRA-600-"m"	PP-600	PP 600-680	II	CHPRA-"X"-II		
SR-620-"m"	0.621-0.640 (15.77-16.27)	SRA-620-"m"	PP-620					
SR-640-"m"	0.641-0.660 (16.28-16.78)	SRA-640-"m"	PP-640					
SR-660-"m"	0.661-0.680 (16.79-17.27)	SRA-660-"m"	PP-660					
SR-680-"m"	0.681-0.700 (17.28-17.79)	SRA-680-"m"	PP-680					
SR-700-"m"	0.701-0.720 (17.80-18.30)	SRA-700-"m"	PP-700	PP 700-780				
SR-720-"m"	0.721-0.740 (18.31-18.81)	SRA-720-"m"	PP-720					
SR-740-"m"	0.741-0.760 (18.82-19.32)	SRA-740-"m"	PP-740					
SR-760-"m"	0.761-0.780 (19.33-19.83)	SRA-760-"m"	PP-760					
SR-780-"m"	0.781-0.800 (19.84-20.34)	SRA-780-"m"	PP-780					
SR-800-"m"	0.801-0.820 (20.35-20.84)	SRA-800-"m"	PP-800	PP 800-860				
SR-820-"m"	0.821-0.840 (20.85-21.35)	SRA-820-"m"	PP-820					
SR-840-"m"	0.841-0.860 (21.36-21.86)	SRA-840-"m"	PP-840					
SR-860-"m"	0.861-0.880 (21.87-22.37)	SRA-860-"m"	PP-860					
SR-880-"m"	0.881-0.900 (22.38-22.87)	SRA-880-"m"	PP-880	PP 880-960			III	CHPRA-"X"-III
SR-900-"m"	0.901-0.920 (22.88-23.38)	SRA-900-"m"	PP-900					
SR-920-"m"	0.921-0.940 (23.39-23.87)	SRA-920-"m"	PP-920					
SR-940-"m"	0.941-0.960 (23.88-24.40)	SRA-940-"m"	PP-940					
SR-960-"m"	0.961-0.980 (24.41-24.89)	SRA-960-"m"	PP-960					
SR-980-"m"	0.981-1.000 (24.90-25.40)	SRA-980-"m"	PP-980	PP 980-1060				
SR-1000-"m"	1.001-1.020 (25.41-25.91)	SRA-1000-"m"	PP-1000					
SR-1020-"m"	1.021-1.040 (25.92-26.42)	SRA-1020-"m"	PP-1020					
SR-1040-"m"	1.041-1.060 (26.43-26.92)	SRA-1040-"m"	PP-1040					
SR-1060-"m"	1.061-1.080 (26.93-27.43)	SRA-1060-"m"	PP-1060					
SR-1080-"m"	1.081-1.100 (27.44-27.94)	SRA-1080-"m"	PP-1080	PP 1080-1160				
SR-1100-"m"	1.101-1.120 (27.95-28.45)	SRA-1100-"m"	PP-1100					
SR-1120-"m"	1.121-1.140 (28.46-28.96)	SRA-1120-"m"	PP-1120					
SR-1140-"m"	1.141-1.160 (28.97-29.46)	SRA-1140-"m"	PP-1140					
SR-1160-"m"	1.161-1.180 (29.47-29.97)	SRA-1160-"m"	PP-1160					

Notes:

Standard Sr Kit includes 10 plugs, 1 Brush and 1 Go/No Go Gauge. However, plugs and items can be ordered individually - Consult factory for more information.

"m" - Substitute the suffix "m" with the following material code: C - carbon steel, S - 316 stainless, B - brass, Y - Cr/Moly, M - monel, K - 90/10 CuNi, J - 70/30 CuNi. Other Materials Available.


"X" - Brush and Go/No Go Gauge furnished with every 10 plugs.

"X" Channel Head Pull Rod Assemblies (See Page 7T) are available in 2', 4', or 6' lengths. Insert the appropriate # for the length required.


HAMMER DRIVEN vs. ENGINEERED TUBE PLUGS

Hammer-driven tapered plugs are prone to ejection during shell-side pressure testing or when tubes are insufficiently vented prior to installation. Unintended plug blowouts present significant safety hazards to both personnel and nearby equipment. Snap It Engineered Tube Plugs provide a controlled, mechanical tube-plugging solution featuring multiple engagement points, engineered to ensure reliable sealing performance in compromised or degraded tubes across heat exchangers, condensers, and boiler systems.

HAMMER-DRIVEN VS.

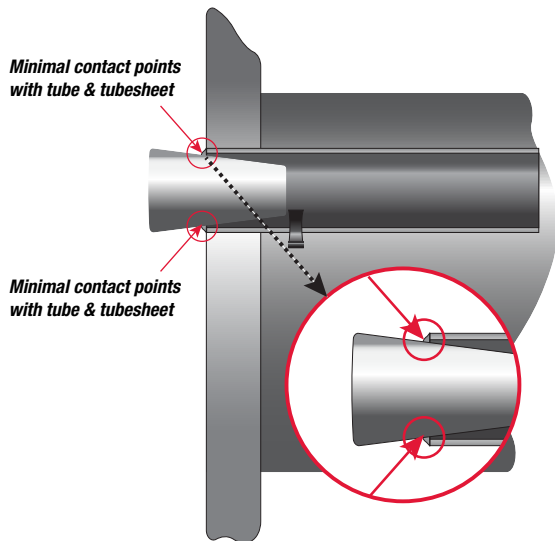

- Welding may be required for high-pressure use
- Can eject violently — serious risk to personnel
- Safety factor unknown
- Welded plugs make future re-tubing difficult and costly
- Uncontrolled force can overstress tubes, joints, or crack tubesheets
- Fails to meet ASME PCC-2 standards

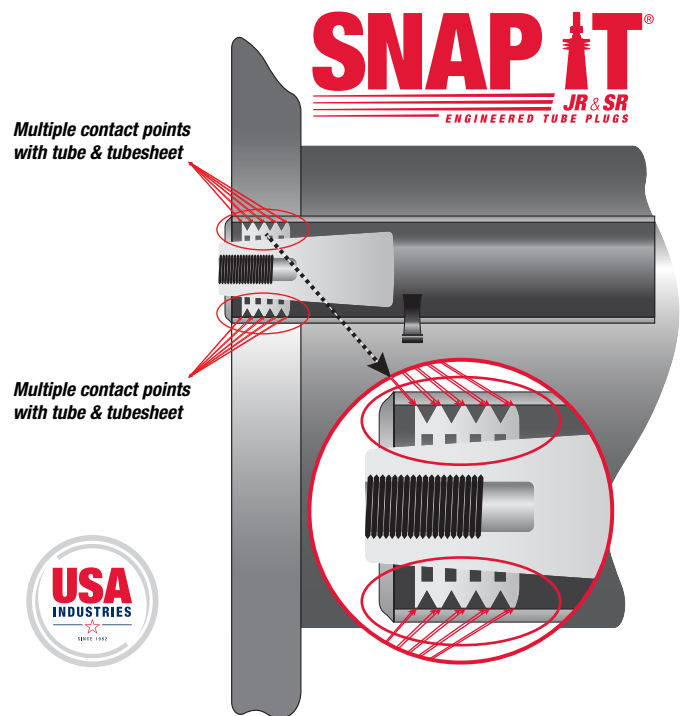


- No welding required
- **Safe** — Jr. model rated up to 1,000 PSID & Sr. model up to 7,000 PSID
- **Reliable** — delivers a helium leak-tight seal
- **Cost-effective** — designed for permanent, lifecycle performance
- **Efficient** — hydraulic installation minimizes turnaround and labor times
- **Controlled** — installation force protects adjacent tubes and ligaments
- Jr. model — suited for through-the-tube plugging
- ASME PCC-2 compliant
- Manufactured in an ISO 9001:2015 registered facility

INSTALLATION & REMOVAL KIT

With USA Industries' Snap It installation and removal tools, the process of plugging your heat exchangers, boilers and condensers couldn't be easier! Now you can remove or eliminate problems caused by welded or hammer-driven tube plugs, such as: safety risks, inconsistent installation, unpredictable pressure-holding capacity, damage to tube sheets, holes and tubes, as well as time-consuming and expensive welding costs!



SNAP IT® TUBE PLUGS INSTALLATION & REMOVAL KIT ACCESSORIES

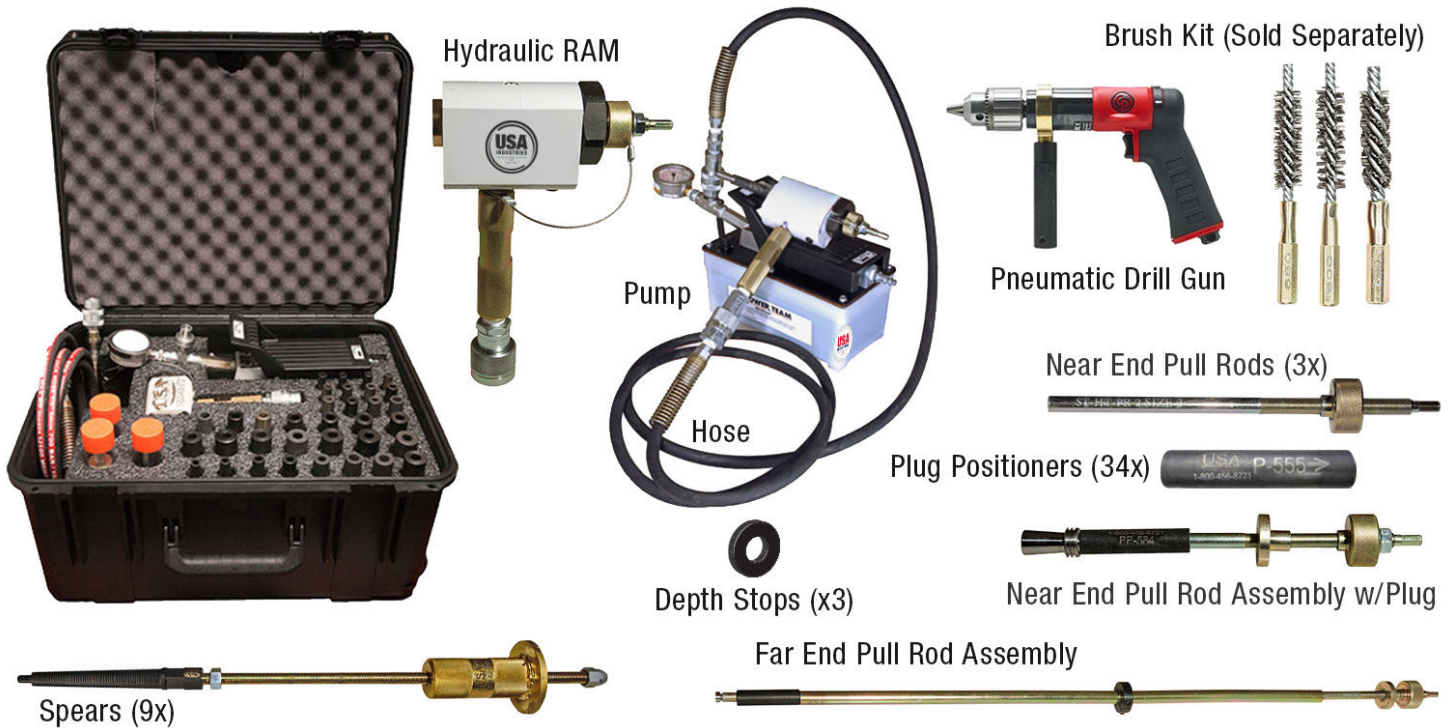

INSTALLATION & REMOVAL KIT



TUBE PREPARATION & INSTALLATION COMPONENTS:

Preparation: Tube brushes are ideal for properly prepping your heat exchanger tubes for a tube plug. The brushes remove pitting and corrosion from inside the tube, allowing optimum sealing and holding forces for your Snap It tube plug.

Pneumatic Drill Gun & Brushes:

Because Snap It Jr. has a range of tube sizes that it can effectively seal, brush kits come with 3-4 brushes per kit. With the pneumatic drill gun, attach the smallest brush in your brush kit that effectively cleans and preps the tube. Snap It Sr. brushes are provided for the exact tube size ordered, ensuring a perfect fit. This step is absolutely crucial to ensuring you have the optimal seal with your tube plugs.

Brush Kit (Sold Separately)



Pneumatic Drill Gun



Installation: Components are compact and Lightweight. The hydraulic ram is the simplest, safest, quickest and easiest way to install Snap It Sr or Snap It Jr tube plugs. Operates on Shop Air - 80 to 120 PsiG (2.7-8.6 BarG) @20 CFM.

Components:

Ram Head | Hydraulic Pump | Hydraulic Hose with Quick Connects and Pressure Gauge | Safety Cable | Near End Pull Rod Assembly

Plug Size Ranges (Tube ID):

JR Model: 0.472" to 1.336" (11.99mm - 33.93mm)

SR Model: 0.401" to 1.180" (10.16mm - 29.97mm)


Hydraulic RAM



Safety Cable



Near End Pull Rod Assembly

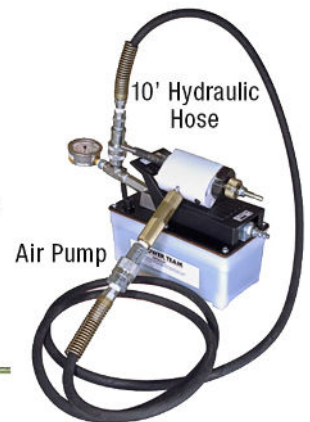

10' Hydraulic Hose

Air Pump

Removal: Designed to easily and quickly remove installed tube plugs. The plug removal tool features a nose piece that threads into the pin of an installed plug, allowing the pin to separate from the ring. The tool securely retains the pin while a serrated spear grips the ring's ID, and the integral slide hammer removes both the ring and pin in a single operation. Extended models are also available.

Components:


Manual Slide Hammer Tool | Spears (multiple size options)



LEAK DETECTION TOOLS

Heat exchangers play a critical role in various industrial processes, and even small leaks can lead to significant performance losses, contamination, and safety hazards. Vacuum leak detection provides a highly sensitive, accurate, and non-destructive method to pinpoint leaks early before they escalate into costly failures.

With the **VLD-2500 Vacuum Leak Detector**, simply seal one end of the tube with a rubber plug or a t-handle with a nozzle, then insert the detector into the tube to be tested and press the trigger. If there's a leak, the VLD-2500 reliably detects it with high precision.

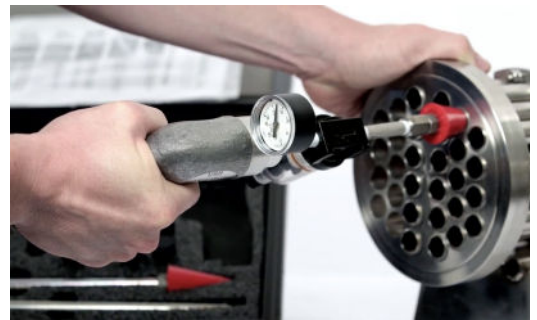

Insert the **TLD 2500 Tube Leak Detector** guns into the tube to be tested. Actuate pressurizing gun by depressing the trigger, the plugging gun seals automatically when pressurizing. After supply pressure is reached, or 100 PSIG (whichever is less), release trigger. If the pressure holds, the tube is OK; if it drops, the tube is leaking - Simple.



You can leak test rolled or welded tube sheet joints with vacuum pressure in just seconds with the **JLD 2500**

Joint Leak

Detector. Insert the nozzle into the tube and press face of the gun into the clean tube sheet joint being tested. Actuate gun to generate the vacuum, if pressure fails to hold...there is a leak.



TUBE CUTTER ONE-REV

Before installing tube plugs in heat exchangers, boilers, or condensers, it is recommended to puncture the tube interior to prevent pressure buildup. If this step is skipped, internal pressure can accumulate and eject the tube plugs, posing serious risks to personnel, equipment, and surrounding property.

USA Industries' **One-Rev Internal Tube Cutters** provide a fast, simple solution for puncturing or cutting the inside of these tubes. Designed for hand operation, the One-Rev Tube Cutter is used with a properly sized wrench, pliers, or ratchet that fits the tool's Drive Shank.



PRODUCT FEATURES:

- **Tube Sizes:** Compatible with 1/2" - 2-1/2" tubes of all gauges
- **Standard Reach:** 10" reach; extended reaches available upon request
- **Cutting Bits:** Manufactured from high-quality, hardened tool steel for maximum cutting edge retention
- **Cutter Compatibility:** Fits 1/2" through 2-1/2" tube cutters
- **Interchangeability:** Directly interchangeable with Airetool bits

OTHER RELATED PRODUCTS

Pipe Bevelers

Used to create an angled edge, or bevel, on the end of a pipe. This process, is a crucial step in preparing pipes for welding to ensure strong, reliable joints.



Pneumatic & Electric Roll Motors

Used to expand tubes to a specific size to create a tight fit within a larger component, a process critical for equipment like boilers and heat exchangers.



Tube Expanders

Attached to a roll motor, they are a tool used to increase the diameter of a tube, to create a tight, leakproof mechanical joint with a tube sheet, header, or another pipe.



Boiler Tube Cutters

A thick-walled boiler tube cutter is a specialized tool, often powered by a drill, used to cut boiler tubes with thick walls in industrial boilers and heat exchangers.



Tube Pullers

Specialized hydraulic tools used to remove tubes from industrial equipment like heat exchangers and boilers. They are designed to grip and extract tubes quickly and efficiently.



Tube Cleaning Equipment & Accessories

Used to remove built-up deposits, scale, and other debris from the inside of pipes, tubes, and other hollow instruments to restore them to peak efficiency. They are essential for maintaining industrial equipment like heat exchangers, condensers, and boilers.



CONTACT INFO

USA INDUSTRIES, LLC:

Texas:

302 State Street
S. Houston, TX 77587
P: +1(713)941-3787 | +1(800)456-8721

4565 Baldwin Boulevard
Corpus Christi, TX 71408
P: +(361)315-7135

Louisiana:

38433 W. Airline Drive
Prairieville, LA 7076
P: +1(225)403-6206

Oklahoma:

RAM Maching Products
9818 S. 219th East Avenue
Broken Arrow, OK 74014

W: <https://USAIndustries.com>

E: info@USAIndustries.com



This information is provided in good faith, and USA Industries believes it to be accurate based on the data available at the time of publication. However, we cannot guarantee or assume responsibility for the results achieved by others who rely on this information. Nothing contained in this document should be interpreted as a warranty—whether express or implied—regarding product performance, merchantability, fitness for a specific application, or any other characteristic.

Additionally, this information should not be viewed as guidance or approval to use any product, method, or process that may conflict with existing patents or proprietary rights. Users are responsible for ensuring that their chosen applications comply with all applicable patents and regulations.

USA Industries is continually improving its products and therefore reserves the right to modify or enhance any design, specification, or material at any time and without prior notice.